

Engine output: **16.0 PS / 11.8 kW**

Machine weight (Cabin/Canopy): **1,780 / 1,680 kg**

For Earth, For Life
Kubota

KX019-4

KUBOTA MINI EXCAVATOR



SUPERIOR PERFORMANCE

Kubota's KX019-4 mini excavator raises the standard in the 1.5-2.0 tonne category with a powerful digging force and a wider working range that rival higher-end excavators. And with enhanced accessibility to sites such as roadsides or residential areas, the KX019-4 gets the jobs done easier from large construction areas to the tightest of places.



SUPERIOR PERFORMANCE




Enhanced digging force

The KX019-4 delivers an impressive bucket digging force. Its powerful and well-balanced arm and bucket allow the operator to dig faster and more efficiently even in the toughest conditions.

Kubota original engine

The KX019-4 is powered by Kubota's impressive D902 16.0 PS engine. Engineered with the power to maximise digging and lifting performance, it also delivers minimised noise and vibration, meeting the engine emission regulations.

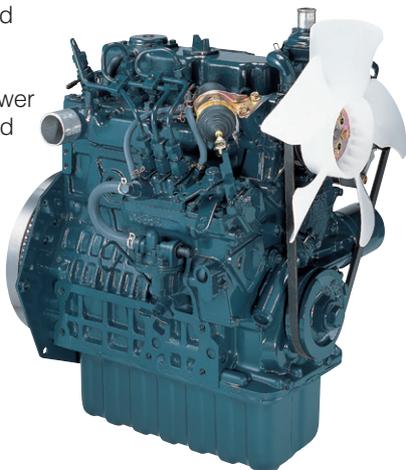

Short-pitched rubber crawler and double-flanged track rollers

The KX019-4 features a short-pitched rubber crawler that minimises vibration. Double-flanged rollers improve stability and travel performance.

Variable track gauge

To optimise stability when using heavy attachments, the KX019-4 tracks can be expanded to a maximum of 1,300mm and retracted to 990mm to make passing through narrow doorways and tight work possible.



Auto-shift

The auto-shift system enables automatic travel shift between high and low depending on traction effort and terrain. This gives smoother operations when dozing and turning.

DELUXE INTERIOR

Offering one of the largest cabins in its class with ample legroom, adjustable seating and a wide door, the KX019-4 brings more comfort to tough work. Combined with the handy new multifunctional digital panel, operations are now easier than ever.



DELUXE INTERIOR




Time



Hour meter



Tachometer



- A. Fuel level gauge**
- B. Water temperature gauge**
- C. Warning lamps**
(overheating, hydraulic, battery)
- D. LCD display (time, hour, rpm)**

Spacious cabin

To minimise fatigue, our larger cabin delivers more comfort over our previous model. It provides more legroom with a flat floor plus an adjustable suspension seat.

Easy cabin entry and exit

Increasing the cabin door width by 30% at the narrowest point allows quick access to and from the cabin making operations that require frequent exiting, such as trenching and piping, much easier.



Digital panel

Following the excellence of Kubota's Intelligent Control System, the digital panel puts convenience at the operator's fingertips. The user-friendly digital panel is positioned to the front right corner of the operator for better visibility, and features one-touch button operation to view the time, hour meter and tachometer. Warning lamps with code numbers on the display will alert you in case of emergencies such as overheating, hydraulic problems or low battery. Programming of the anti-theft keys can also be easily performed with the digital panel. With easier access, simpler settings, easy-to-read indicators and alerts, you'll always be aware of the excavator's functioning status.

Proportional flow control of auxiliary circuit (AUX1/2)* and maximum oil flow setting

An auxiliary circuit (AUX1) comes standard on the KX019-4. The convenient thumb-operated switch allows easy proportional flow control of auxiliary circuit, while a forefinger-operated on/off switch enables simple operation of special applications that require a constant oil flow. The maximum oil flow setting is conveniently adjustable from the digital panel – no additional tools or complex manual adjusting procedures are necessary. You can even programme up to five oil flow rates corresponding to specific attachments into the memory on the digital panel. The programmed settings can be quickly retrieved for the next job.

*AUX2 as option (10.4 l/min)



EASY MAINTENANCE SAFETY/DURABILITY


The KX019-4 offers added peace-of-mind with extremely high levels of safety and durability. Furthermore, Kubota simplifies inspections and repairs with easier accessibility to the major components.



Easy maintenance

Kubota has made routine maintenance extremely simple by consolidating primary engine components onto one side for easier access. Engine and other vital components can be inspected quickly and easily.

- A. Air cleaner**
- B. Water separator**
- C. Fuel filter**
- D. Alternator**
- E. Starter motor**

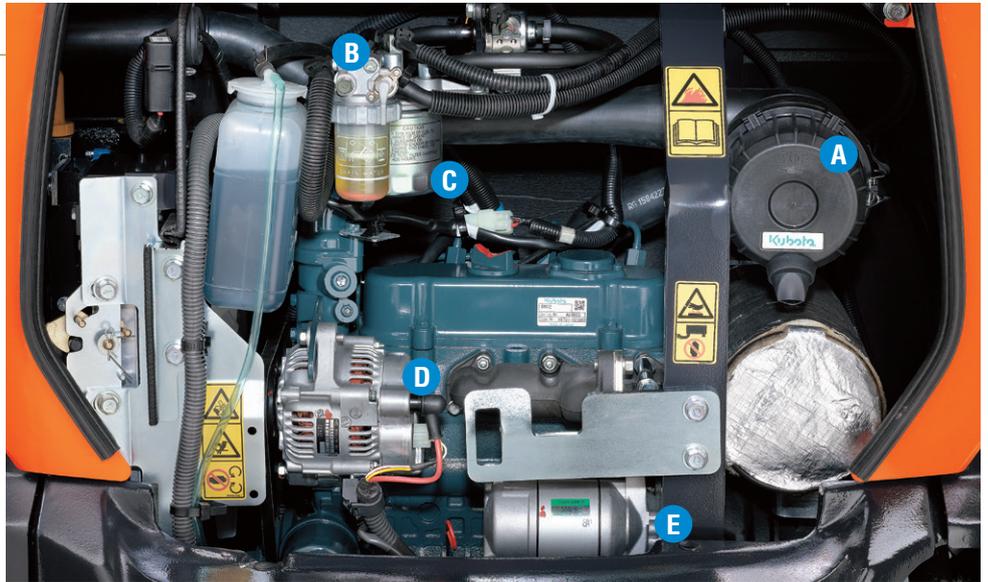

Topside boom cylinder

For increased reliability when performing in hazardous conditions, including demolition jobs when a breaker is fitted, the boom cylinder has been positioned on the topside of the boom to prevent cylinder damage.



Integrated travel motor hoses

Kubota has enclosed the travel motor hoses within the track frame for added protection.



Standard Equipment

Engine/Fuel system

- Double-element air cleaner
- Fuel refueling buzzer
- Extended fuel filler

Undercarriage

- 230 mm rubber track
- 2-speed travel
- Variable track
- Double flange track roller
- Short pitched rubber crawler

Hydraulic system

- Pressure accumulator
- Hydraulic pressure checking ports
- Third line hydraulic direct return for AUX
- Variable displacement pump
- Straight travel circuit
- Adjustable maximum oil flow on auxiliary hydraulic circuit (AUX1)
- Auxiliary switch (AUX1) on right control lever (proportional)

Safety system

- Engine start safety system on the left console
- Travel lock system
- Swivel lock system
- Kubota original anti-theft system
- Battery isolator



Working equipment

- 1190 mm arm
- Auxiliary hydraulic circuit piping to the arm's end
- 2 LED working lights on the cabin and 1 LED light on the boom

Cabin

- ROPS (Roll-over Protective Structure, ISO3471)
- TOPS (Tip-Over Protective Structure)
- OPG (Operator Protective Guard, Level 1)
- Weight-adjustable suspension seat
- Retractable seatbelt
- Hydraulic pilot control levers with wrist rests
- Cabin heater for defrosting and demisting with air ventilation
- Emergency exit hammer
- Front window power-assisted with gas damper
- 12V power outlet
- Location for radio
- Switch and harness for beacon light
- Digital panel with diagnosis function
- Front guard fixing point
- Side mirror

Canopy

- ROPS (Roll-over Protective Structure, ISO3471)
- TOPS (Tip-Over Protective Structure)
- OPG (Operator Protective Guard, Level 1)
- Weight-adjustable suspension seat
- Retractable seatbelt

- Hydraulic pilot control levers with wrist rests
- 12V power outlet
- Switch and harness for beacon light
- Digital panel with diagnosis function
- Front guard fixing point

Optional Equipment

- 1090 mm arm (-100 mm)
- Radio installation kit on the cabin (Radio bracket, antenna, 2 speakers)
- 2 LED working lights on the canopy
- Travel pedal
- Front guard on the cabin/canopy
- Short front ver.
- Adjustable maximum oil flow on auxiliary hydraulic circuit (AUX2)
- Auxiliary switch (AUX2) on left control lever (proportional)

Kubota Genuine and Approved Parts

for maximum performance, durability and safety



SPECIFICATIONS

Model		KX019-4		
Machine weight*1 (cabin / canopy)		kg	1780 / 1680	
Operating weight*2 (cabin / canopy)		kg	1855 / 1755	
Bucket capacity, std. SAE/CECE		m ³	0.041 / 0.035	
Engine	Model		D902-E4	
	Type		Water-cooled, diesel engine E-TVCS	
	Output ISO 14396 ³	PS (kW) / rpm	16.0 (11.8) / 2300	
	Output ISO 9249 NET ³	PS (kW) / rpm	15.8 (11.6) / 2300	
	Number of cylinders		3	
	Bore × Stroke		mm 72 × 73.6	
	Displacement		cc 898	
	Fuel*4		Diesel fuel conforming to EN 590 / HVO conforming to EN 15940	
Dimensions	Overall width		mm 990 / 1300	
	Overall height (Cabin / Canopy)		mm 2350 / 2330	
	Overall length		mm 3860	
	Ground clearance		mm 160	
	Dozer size (width × height)		mm 990 / 1300 × 230	
	Rubber shoe width		mm 230	
	Minimum front swivel radius		mm 1520	
	Boom swing angle (left / right)		deg 75 / 60	
Hydraulic System	P1, P2		Variable displacement pump	
	Flow rate ℓ /min		17.3	
	Hydraulic pressure MPa (kgf/cm ²)		21.6 (220)	
	P3		Gear pump	
	Flow rate ℓ /min		10.4	
	Hydraulic pressure MPa (kgf/cm ²)		20.6 (210)	
	Auxiliary (AUX1)	Max. flow rate ℓ /min		27.7
		Max. hydraulic pressure MPa (kgf/cm ²)		21.6 (220)
	Auxiliary (AUX2)	Max. flow rate ℓ /min		10.4
		Max. hydraulic pressure MPa (kgf/cm ²)		20.6 (210)
Max. digging force	Arm	kN (kgf)	7.8 (790)	
	Bucket	kN (kgf)	15.9 (1620)	
Hydraulic reservoir (full)		ℓ	28	
Max. travelling speed (low / high)		km/h	2.2 / 4.0	
Ground contact pressure (cabin / canopy)		kPa (kgf/cm ²)	27.4 (0.28) / 26.5 (0.27)	
Swivelling speed		rpm	9.1	
Fuel tank capacity		ℓ	21	
Noise level	LpA	dB (A)	78	
	LwA (2000/14/EC)	dB (A)	93	
Vibration ⁵	Hand arm system (ISO 5349-2:2001)	Digging	m/s ² RMS	<2.5
		Levelling	m/s ² RMS	<2.5
		Driving	m/s ² RMS	<2.5
		Idling	m/s ² RMS	<2.5
	Whole body (ISO 2631-1:1997)	Digging	m/s ² RMS	<0.5
		Levelling	m/s ² RMS	<0.5
		Driving	m/s ² RMS	<0.5
		Idling	m/s ² RMS	<0.5

*1 With 33.5 kg Kubota original bucket, 1190 mm arm, full tanks, rubber shoe.

*2 Machine weight + 75 kg operator.

*3 With diesel fuel conforming to EN590.

*4 Note that HVO has lower density than diesel fuels.

*5 These values are measured under specific conditions at maximum engine speed and can deviate, depending on the operating status.

LIFTING CAPACITY

Cabin, rubber version



kN (t)

Lift Point Height	Lifting point radius (2.5m)			Lifting point radius (max)		
	Over-front		Over-side	Over-front		Over-side
	Blade Down	Blade Up		Blade Down	Blade Up	
2.0m	1.9 (0.19)	1.9 (0.19)	1.8 (0.18)	-	-	-
1.5m	2.4 (0.24)	2.4 (0.24)	1.8 (0.18)	-	-	-
1.0m	2.9 (0.30)	2.9 (0.30)	2.9 (0.30)	2.2 (0.22)	2.0 (0.20)	2.1 (0.21)
0m	3.5 (0.36)	3.1 (0.32)	2.9 (0.30)	-	-	2.1 (0.21)


*The lifting capacities are based on ISO 10567 and do not exceed 75% of the static tilt load of the machine or 87% of the hydraulic lifting capacities of the machine.

**The excavator bucket, hook, sling and other lifting accessories are not included on this table.

WORKING RANGE

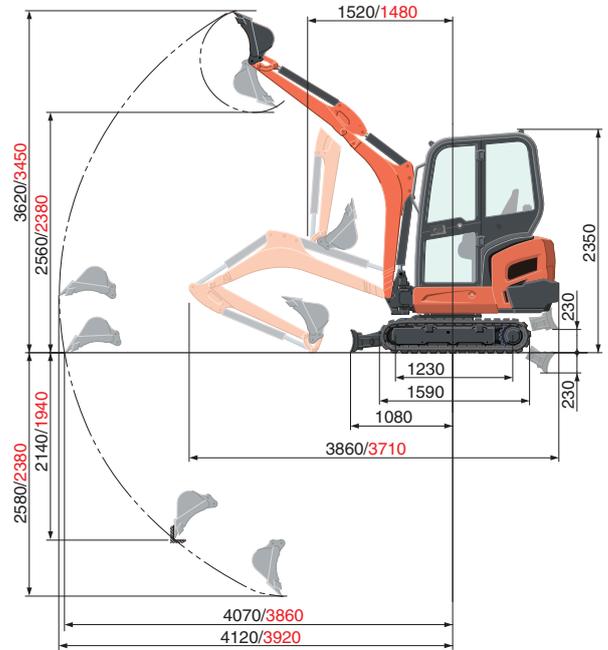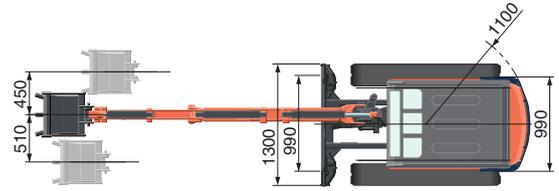

1090 mm arm
1190 mm arm
Unit: mm

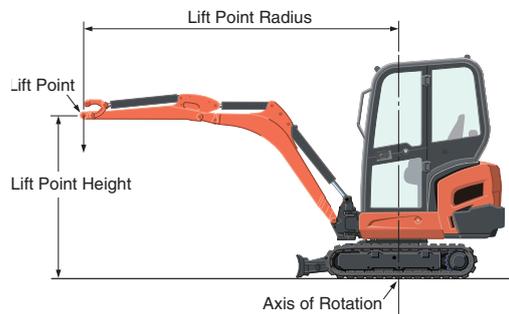

* Working ranges are with Kubota original bucket, without quick coupler.

* Specifications are subject to change without notice for purpose of improvement.

★ All images shown are for brochure purposes only.

When operating the excavator, wear clothing and equipment in accordance to local legal and safety regulations.

KUBOTA EUROPE S.A.S.

19 rue Jules Verceyruisse
Zone Industrielle - CS 50088
95101 Argenteuil Cedex France
Téléphone : (33) 01 34 26 34 34
Télécopieur : (33) 01 34 26 34 99

KUBOTA Baumaschinen GmbH

Steinhauser Straße 100
D-66482 Zweibrücken Germany
Telefon : (49) 0 63 32 - 487 - 0
F a x : (49) 0 63 32 - 487 - 101

<http://www.kubota-eu.com>

